

## Biodegradation of Phenol by an Application of *Pseudomonas spp.* ETL-2414

Maulin P Shah, Soniya Sebastian, Hemangi M Mathukiya, A M Darji

Applied & Environmental Microbiology Lab, Enviro Technology Limited (CETP), Ankleshwar- 393 002, Gujarat, INDIA  
[shahmp@uniphos.com](mailto:shahmp@uniphos.com)

### ABSTRACT:

The present investigation was undertaken to isolate and assess the microbial degradation of phenol by bioaugmentation of *Pseudomonas spp.* ETL-2414 isolated from activated sludge of Final Effluent Treatment Plant (FETP) based at Ankleshwar (Gujarat, India). The strain was isolated and designated as *Pseudomonas spp.* ETL 2414 after examined for colony morphology, gram stain characteristics and various biochemical tests. *Pseudomonas spp.* ETL 2414 was found to be highly effectual for the removal of phenol which was used as sole carbon and energy source. From an initial concentration of 200 mg l<sup>-1</sup> it degraded to 76.43 ± 1.23 mg l<sup>-1</sup>. In turn the effect of temperature (25 to 50°C), pH (5.5 – 10.5) and glucose concentration (0, 0.25 and 0.5%) on the rate of phenol degradation was investigated. Observations revealed that the rate of phenol biodegradation was affected by pH, temperature of incubation and glucose concentration. The optimal conditions for phenol removal were found to be pH of 7.5 (82.63% removal), temperature, 30°C (78.69% removal) and 0.25% supplemented glucose level (98.28% removal). It can be concluded that this strain has remarkable potential for application in bioremediation and wastewater treatment, especially in detoxification of phenolic waste. The significance & impact of the study is the utilization of native bacterial strains isolated from the waste water itself having potential for environmental bioremediation in the activated sludge process of a FETP Plant.

Keywords: *Pseudomonas*, Bioremediation, FETP, Bioaugmentation

### INTRODUCTION

Traditionally waste waters were treated by Physico Chemical methods, but recently Microbial Degradation has been widely studied and used as a low-cost alternative and offering the possibility of complete mineralization of organic compounds. [1]. Phenolic constitutes 11 of the 126 chemicals that have been designated as priority by the United States Environmental Protection Agency [2]. Phenol in water and wastewater has been the major organic chemicals [3], and is associated with pulp mills, coal mines, gasoline, petrochemicals, wood preservation plants, pesticides, insecticides, herbicides, detergents, solvents, polymeric resin production, plastic rubber proofing, disinfectants, pharmaceuticals, metallurgical, explosives, textiles, dyes, the coffee industry, domestic waste, agricultural run-off, and chemical spills [4-8]. The maximum Permissible limit of Phenolic compounds in leachates for safe disposal to inland surface water is 1 mg/l. It is greatly concerned pollutant and included in list of EPA (1979). Phenol is currently removed by methods such as precipitation/coagulation, osmosis, ion-exchange, ultra filtration, electro dialysis, electrochemical degradation, floatation, etc., which are costly and inefficient. These current treatment methods often produce other toxic end products, requiring further processing steps [6, 9-10]. On the other hand, biodegradation has been studied as an alternative approach due to the low costs associated with this option, as well as the possibility of complete mineralization of xenobiotic [11]. In future technologies, for bioremediation microbial systems might be the potential tool to deal with the Environmental Pollutants [12]. Microbial degradation of Phenol has been actively studied and these studies have shown that Phenol can be aerobically degraded

by wide variety of fungi and bacterial cultures such as *Candida tropicalis* [13-15], *Acinetobacter calcoaceticus* [16], *Alcaligenes eutrophus* [17-18], *Pseudomonas putida* [19-20]. Phenol biodegradation has been chosen as a method to remediate environments contaminated by Phenol, which is massively discharged from uncontrolled industrial waste disposal. Phenol has traditionally been removed from industrial effluents by costly Physico – chemical methods, but biodegradation has been studied recently as an alternative [21-22] on account of its lower cost associated with this as well as the possibility of complete mineralization of the xenobiotics.

### MATERIALS AND METHODS:

(A) Chemicals and Reagents: Phenol used in the study was of analytical grade and purchased from Merk, India. All other chemicals were also of analytical grade which were purchased from Merk and Hi-Media laboratories, India.

(B) Isolation of bacterial strain by enrichment method: The activated sample was collected from Final Effluent Treatment Plant (FETP) of Ankleshwar, Gujarat, India. A quantity of one gram of activated sludge sample was suspended in 100 ml of Minimal Salt Medium (MSM) containing Na<sub>2</sub>HPO<sub>4</sub> (6g), KH<sub>2</sub>PO<sub>4</sub> (3g), NaCl (0.8g), NH<sub>4</sub>Cl (0.5g), CaCl<sub>2</sub>·2H<sub>2</sub>O (1M) and MgSO<sub>4</sub>·7H<sub>2</sub>O (1M) in 1000 ml of distilled water. 10 mg/L of phenol was used as sole source of carbon and then incubated in 250 ml flask at 37± 2°C on rotary shaker incubator (REMI, India) at 130rpm for a week [23]. A volume of 5 ml of enriched media was transferred into freshly prepared media on each week supplemented with 10 mg phenol and then incubated at 30°C. The isolated single colonies were streaked on Nutrient Agar Plates,

incubated at 30°C overnight and then the pure isolates were stored on LB agar slants supplemented with phenol as sole source of carbon at 4°C until further use.

(C) **Identification of Isolates:** The isolate was identified based on morphological observations and biochemical characterization. The tests involved were Gram staining, Amylase and Gelatinase production, Citrate utilization, Indole test etc., [24-25]. Bergey's manual of determinative bacteriology was used as a reference to identify the isolates [26].

(D) **Strain Selection based on Phenol acclimatization:** The isolate coded as ETL 2414 was inoculated into MSM (Mineral Salt Medium) containing 10mg/L phenol as carbon source for 72 hrs shaking at 130 rpm. After 24 hrs, the growth of cells was determined by turbidity measurement at 600 nm. The concentration of phenol was increased from 10 mg/L to 250 mg/L subsequently.

#### (E) Phenol degrading studies:

Bacterial isolate strain coded ETL 2414 was grown in the Nutrient Broth by incubating overnight at 37°C on shaker at 130 rpm. This 24 hrs old culture was inoculated into MSM medium with phenol as sole carbon source. Preliminary degradation studies were carried out with addition of bacteria on media containing 10 mg/L of phenol and cultivated in submerged conditions at 37°C at 130 rpm for 120 hrs. The reaction mixture containing all components but devoid of bacterial inoculums were used as control. Then same procedure was followed by increasing concentration of phenol from 10 mg/L to 250 mg/L. The phenol concentration was determined by analyzing samples at each 8 hours interval by using UV spectrophotometer 1800 SHIMADZU, JAPAN. The residual amount of phenolic compounds present in the sample at different inoculation period were measured by colorimetric assay 4-Amino Antipyrine method (APHA, 1992)

**The 4-amino Antipyrine method:** When phenol reacts with 4-Amino Antipyrine at pH  $7.9 \pm 0.1$  in the presence of Potassium ferricyanide forms colored Antipyrine dye this dye is kept in aqueous solution and the absorbance is measured at 500 nm. 70  $\mu$ l of 0.5 N  $\text{NH}_4\text{OH}$  solution was added into the sample and pH is adjusted to  $7.9 \pm 0.1$  with phosphate buffer, 30  $\mu$ l of 4-Amino Antipyrine solution was added and mixed well and 30  $\mu$ l of  $\text{K}_3\text{Fe}(\text{CN})_6$  solution is added. After 15 minutes it was transferred to cells and absence of sample was monitored against the blank at 500 nm. It is noted that after the addition of various concentrations of phenol (10, 20, 50, 100, 200 mg/l). The initial sample was collected and readings were monitored by 4-Amino Antipyrine method and kept as standard optical density values.

#### Experimental Procedure:

To study the optimum functional pH, temp., and carbon source for maximum degradation, variation in incubation temperature (25 to 50°C) with constant initial concentration of Phenol (200 mg/L) and neutral pH in absence of carbon was carried out. Similarly, other Parameters were kept constant, and pH was varied between 4.5 and 10.5. For optimization of glucose as carbon source, keeping the cultures at pH 7 and 30°C, three different glucose status viz. without glucose, with 0.25% glucose and 0.50% of glucose were chosen in the media containing bacterial suspension and Phenol. The residual Phenol concentration was measured at time slots of 8, 16, 24, 32 hrs. All the results were given as a mean with standard deviation ( $\pm$ SD). The experimental results confirmed that aeration and mixing do not cause Phenol volatilization.

#### RESULTS AND DISCUSSION:

##### Bacterial Isolation & Identification:

The present study was aimed to degrade aromatic organic compound Phenol using microbes isolate from activated sludge of Final Effluent Treatment Plant of Ankleshwar, Gujarat, India. Many different isolates were obtained from the Activated Sludge of Final Effluent Treatment Plant (FETP), but one major colony was taken and identified based on morphological, cultural and biochemical characteristics. Up to 45 days, sample was enriched in sterile MSM medium using phenol as sole carbon source. The sample was further treated with phenol to ensure that only phenol resistant strain would be selected.

The bacterial isolate coded as ETL-2414 have the best potential for phenol biodegradation based on high resistance of this xenobiotic compound. The bacterial isolate was morphologically and biochemical characterized & properties were listed in Table 1 & 2. According to Bergey's manual of determinative of Bacteriology, 95% of results showed the similarity in characteristics with *Pseudomonas spp.*

##### Effect of Incubation Temperature on Phenol degradation studies:

As shown in Fig. 1 Microbial degradation of phenol was observed over a wide temperature range (25°C – 50°C) with an optimum of 30°C. Temperature might play an equivalent or larger role than nutrient availability in the degradation of organic pollutants [27]. In this work batch culture of *Pseudomonas spp.* ETL-2414 was studied in media containing just phenol as a sole carbon and energy source. As a result biodegradation is limited by phenol concentration only. The most important factor that can affect negatively on biodegradation process is phenol inhibition which is stronger at high phenol concentration more than 200 mg/L the process. As the subjective of this study is to evaluate performance of phenol removal process, the

studied phenol concentrations were 10, 20, 50, 100, 200 mg/L, while in 250 mg/L the inhibitory effect of phenol could stop the growth and phenol biodegradation, which means the bacteria could not tolerate substrate toxicity in this case, therefore studied concentration is limited to 200 mg/L and higher concentrations are not examined. In order to evaluate the possibility of phenol removal by aeration or mixing control experiments were conducted in the same condition without the bacterium. According to Pakula *et al.*, [28], phenol biodegradation was significantly inhibited at 30°C. However, most laboratory studies on phenol degradation have been carried out at an optimum temperature of 30°C [29-30]. Annadurai *et al.*, [31] and Chitra [32] described that when the temperature increased to beyond 30°C or 35°C, no or less phenol degradation was observed due to cell decay, which is a temperature-dependent parameter. At the end of 32 hrs 80% of phenol was degraded by ETL-2414 at 30°C and 60% at 40°C, while at extreme temperatures of 25°C and 50°C it was only 40 and 20% respectively. This corroborates with previous studies by Polymenakou and Stephanou [33] and Rosa *et al.*, [34] on phenol degradation by soil *Pseudomonas*. They recorded maximum degradation rates for phenol to be at 30°C. However temperature of 35°C also showed considerable degradation but level of degradation was lower than 30°C. Similar results have been reported on the *Pseudomonas piclorum* at 30°C [35].

#### Effect of pH on phenol degradation:

The pH range from 4.5 to 10.5 with an optimum of 7.5 was found suitable for the degradation of phenol (Fig.2). The internal environment of all living cell is believed to be approximately neutral. Most organisms cannot tolerate pH values below 4.0 or above 9.0 [36]. At low (4.0) or high (9.0) pH values, acids or bases can penetrate into cells more easily, because they tend to exist in undissociated form under these conditions and electrostatic force cannot prevent them from entering cells [31-32,36-37]. Increasing the pH of media at 30°C increased the rate of phenol degradation (fig.2) from 4.5 to 7.5. On increasing the pH further it had reserved effect on ETL-2414 phenol removal potentially. In 8 hrs 40% phenol was removed at pH 7.5, while rest of the pH conditions could not degrade phenol more than 10%. Both acidic and highly alkaline pH had marked inhibitory growth on phenol removal efficiency. After 8, 18, 24 & 32 hrs also analogous result was seen with only 82.63% removal till end at pH 7.5 at 30°C. These results were sustainable with work by Karigar *et al.*, [38] on *Arthrobacter citris*. This may be due to the effect of pH on the ionization and therefore binding and interaction of a myriad of molecular process, which in turn affect the metabolic pathway. It could even causes denaturing of proteins which might result in lethal toxicity.

#### Effect of glucose on phenol degradation:

Phenol removal efficiency was determined at different glucose concentration at a neutral pH of 7.5 and 30°C temperature for ETL-2414. The data collected after 36 hrs showed that maximum phenol removal efficiency of 98.28 % was accessible at 0.25% of glucose concentration. This might be due to the fact that glucose acts as a growth factor in presence of phenol in the waste water due to its simple structure as compared to phenol. But noticeably it was found that it was decreased to 48.35% with increasing glucose concentration to 0.75% and also in the absence of glucose media devoid of glucose, at the end of the 36 hrs phenol removal was about 88%. Previously Kar *et al.*, [39] showed the effect of glucose on phenol degradation and the results indicated that when a mixed substrate (Phenol and glucose) was used, phenol acclimatized population showed initial preference for phenol to glucose concentration. A glucose concentration of 0.50% repressed the induction of phenol oxidation through glucose did not fully repressed utilization of phenol. Alike results were obtained by Santos *et al.*, [40] and Khaled [41] in their respective studies.

#### CONCLUSION:

Considering the present situation of Environment, Long term strategy for the permanent solution of Phenol removal in waste water is permanently required. Industrial waste water treatment is now emerging as a challenging task for greener and sustainable environment. Hence it was quite important to adopt a technology which was ecofriendly as well as economically viable with this motto and vision; we have initiated a novel research work for the benefit of upcoming environmental scenario. Contamination of the environment with hazardous and toxic chemicals is one of the major problems faced by industrialized nations today. Therefore it can be concluded that *Pseudomonas spp.* ETL-2414 isolated from final effluent treatment Plant of Ankleshwar (Gujarat, India) can be a promising phenol degraders at an optimum pH of 7.5 and an incubation temperature of 30°C. Glucose addition up to a specific low concentration could improve the degradation rate, but impeded the degradation process at higher concentrations. Hence, this strain has remarkable potential for application in bioremediation and wastewater treatment, especially in detoxification of phenolic waste. The present study mainly focused on *Pseudomonas spp.* ETL-2414 for its dynamics not only on phenol degradation but also removal of toxic pollutants using cost effective process as a part of developing an innovative Microbial Technology for cheaper and effective treatment of Phenol degradation.

Table I: Biochemical Characterization of Microbes

(A) MORPHOLOGICAL PROPERTIES:	
1. Gram's Staining	Gram negative short rods
2. Motility	Positive
(B) CULTURAL CHARACTERISTICS	
1. On nutrient Agar	translucent bluish green
2. pigmentation	Diffused colonies

Table II: Biochemical Properties

Sr. No.	Test	Result
1	Catalase production	+
2	Oxidase production	+
3	Indole production	-
4	Methyl Red	-
5	Voges Prouskaur	-
6	Nitrate reduction	+
7	Citrate utilization	+
8	Urease production	-

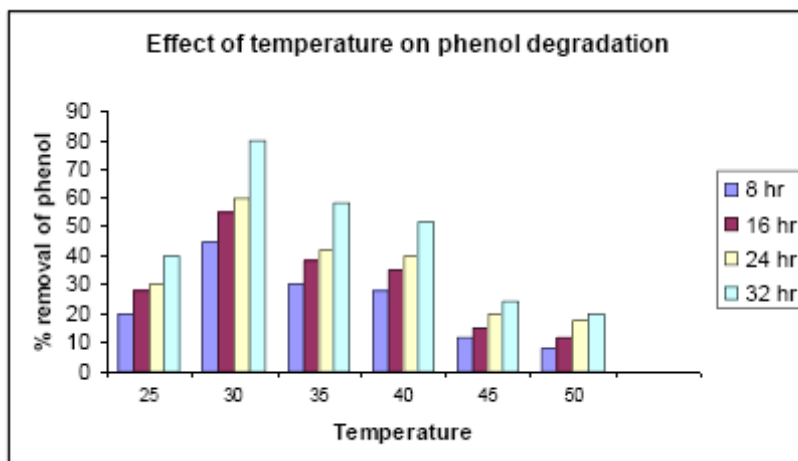


Figure: I: Effect of Temperature on Phenol Degradation

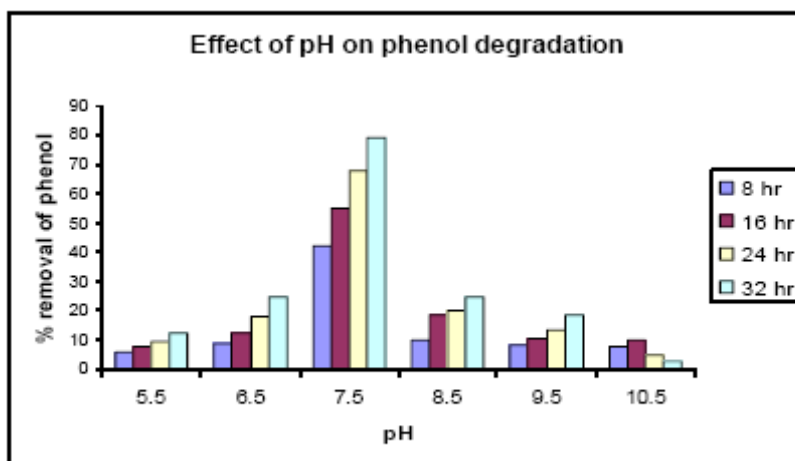


Figure: II Effect Of pH On Phenol Degradation

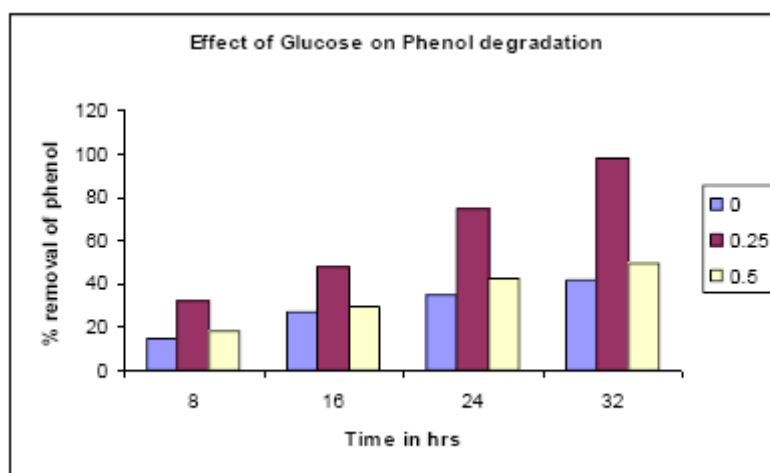


Figure: III: Effect Of Glucose on Phenol Degradation

**ACKNOWLEDGEMENT:** Authors are highly grateful to the management of Enviro Technology Limited., Ankleshwar, Gujarat, India for allowing us to carry out such a noble work for the sustainable environment.

## REFERENCES:

- [1] Collins L.D. and Daugulis A.J. (1997) Characterization and optimization of a two phase partitioning bioreactor for the biodegradation of phenol. *Applied microbial Biotechnology*, 48:18-22.
- [2] Caturla F., Martin-Martinez J.M., Molina-Sabio M., Rodriguez-Reinoso F., Torregrosa R. (1998) Adsorption of substituted phenols on activated carbon. *J Coll Interface Sci.* 124:528-534.
- [3] Loh K.C., Wang S.J (1998) Enhancement of biodegradation of phenol and a nongrowth substrate 4-chlorophenol by medium augmentation with conventional carbon sources. *Biodegradation*, 8:329-338.
- [4] Bulbul G., Aksu Z. (1997) Investigation of wastewater treatment containing phenol using free and Ca-alginate gel immobilized *Pseudomonas putida* in a batch stirred reactor. *Turkish J Eng Environ Sci.* 21 175-181.
- [5] Aksu S., Yener J. (1998) Investigation of biosorption of phenol and monochlorinated phenols on the dried activated sludge. *Process Biochem*, 33:649-655.
- [6] Gupta V.K., Sharma S., Yadav I.S., Mohan D. (1998) Utilization of bagasse fly ash generated in the sugar industry for the removal and recovery of phenol and *P*-nitrophenol from wastewater. *J Chem Technol Biotechnol*, 71:180-186.
- [7] Loh K.C., Chung T.S., Wei-Fern A. (2000) Immobilized cell membrane bioreactor for high strength phenol wastewater. *J Environ Eng*, 126:75-79.
- [8] Sung R.H., Soydo V., Hiroaki O. (2000) Biodegradation by mixed microorganism of granular activated carbon loaded with a mixture of phenols. *Biotechnology Lett.* 22:1093-1096.
- [9] Kobayashi W., Rittmann B.E. (1982) Microbial removal of hazardous organic compounds. *Environ Sci Technol.* 16:170-183.
- [10] Rengraj S., Seung-hyeon Moon., Sivabalam R., Arabindoo B., Murugesan V. (2002) Agricultural solid waste for the removal of organics: adsorption of phenol from water and wastewater by palm seed coat activated carbon. *Waste Manage*, 22:543-548.
- [11] Singleton I. (1994) Microbial metabolism of xenobiotics: fundamental and applied research. *J Chem Technol Biotechnol*, 59:9-23.
- [12] Nair C.I., Jayachandran K., Shashidhar S. (2008) Biodegradation of Phenol. *African journal of biotechnology*, 7(25), 4951-4958.
- [13] Ruiz Ordaz N., Ruiz Lenguez J.C., Castanol, Gonzalez J.H. Hernandez Manzano E., Christaine Urbina E., Galindez-Mayer J. (2001) Phenol biodegradation using a repeated batch culture of *Candida tropicalis* in a multistage bubble column., *Revista Latinoamericana de Microbiologia*, 43: 19-25.
- [14] Chang Y.H., Li C.T., Chang M.C., Shieh W.K. (1998) Batch phenol degradation by *Candida tropicalis* and its fusant. *Biotechnol. Bioeng.* 60:391-395.
- [15] Ruiz Ordaz N., Ruiz Lenguez J.C., Castanol, Gonzalez J.H., Hernandez Manzano E., Christaine Urbina E., Galindez-Mayer J. (1998) Growth kinetic model that describes the inhibitory and lytic effects of phenol on *Candida tropicalis* yeast. *Biotechno. Prog*, 14:966-969.



- [16] Paller G., Hommel R.K., Kleber H.P. (1995) Phenol degradation by *Acenatobacter calcoaceticus* NCIB 8250. J. Basic Microbial, 35: 325-335.
- [17] Hughes E.J., Bayly R.C., Skurry R.A. (1984) Evidence for Isofunctional enzymes in the degradation of Phenol, m-and p-toluate, and p-cresol via catechol metacleaveage pathways in *Alkalegenes eutrophus*. J. Bacteriol. 158:79-83.
- [18] Leonard D., Lindley N.D. (1998) Carbon and Energy Flux constraints in continuous culture of *Alcaliens eutrophus* grown on phenol. Microbiology, 144:241-248.
- [19] Hill G.A., Robinson C.W. (1975) Substrate inhibition kinetics: Phenol degradation by *Pseudomonas putida*. Biotechnol. Biogeng. 17:599-615.
- [20] Nikakhatri H., Hill G.A. (2006) Continuous bioremediation of phenol polluted air in an external loop airlift bioreactor with apacked bed. J. Chem. Tech. Biotechnol. 81(6):1029-1038.
- [21] Fulekar M.H. (2005a) Environmental Biotechnology, Oxford and IBH publishing House, New Delhi.
- [22] Fulekar M.H. (2005b) Bioremediation Technology for Environment, IJEP, 25(4), 358-364.
- [23] Nagmani A., Saligala R., Lowry M. (2000) Isolation and Characterization of phenol degradaing *Xanthobacter flavus*. African Journal of Biotechnology, 8 (20), 3449-5453.
- [24] Tortora G.J., Funke, B.R. and Case C.L. (2004) Microbiology: An introduction. Person Benjamin Cumming, United States.
- [25] Benson H.J. (1994) Microbiology applications, 6<sup>th</sup> edition. Brown Publishers, London.
- [26] GoodFellow M. (1994) Bergey's manual of determinative bacteriology 9<sup>th</sup> edition, Williams and Wilkin, London.
- [27] Margesin R., Schinner F. (1997) Effect of temperature on oil degradation by psychrophilic yeast in liquid culture and in soil. FEMS Microbiol. Ecol., 24:243-249.
- [28] Pakula A., Bieszkiewicz E., Bowszczyk Maleszak. H., Mycielski R. (1999) Biodegradation of phenol by bacterial strains from petroleum refining wastewater purification plant. Acta Microbiol. Pol 48:373-380.
- [29] Annadurai G., Juang R.S., Lee D.J. (2002) Microbiological degradation of phenol using mixed liquors of *Pseudomonas putida* and activated sludge. Waste Manage, 22:703-710.
- [30] Paraskevi N.P., Euripides G.S. (2005) Effect of temperature and additional carbon sources on phenol degradation by an indigenous soil *Pseudomonas*. Biodegradation, 16:403-413.
- [31] Annadurai G., Mathalai Balan. S., Murugesan T. (1999) BOX-Behnken design in the development of optimized complex medium for phenol degradation using *Pseudomonas putida* (NCIM 2174). Bioprocess Eng. 21:415-421.
- [32] Chitra S. (1995) Studies on biodegradation of phenolic compounds by *Pseudomonas piclorum*. PhD Thesis CLRI, University of Madras, Chennai-25.
- [33] Polymenakou, P.N. and E.G. Stephanou. (2005) Effect of temperature and additional carbon sources on phenol degradation by an indigenous soil *Pseudomonad.*, Biodegradation, 16, 403-413.
- [34] Rosa M., S. Peter., S. Cathrin. and M.G. Anne. (2004) *Arthrobacter psychrophenicus* sp. isolated from an alpine ice cave. Int. J. Syst. Evol. Microbiol. 54, 2067-2072.
- [35] Gurusamy A., Y.L. Lai. and F.L. Jiunn. (2007) Biodegradation of phenol by *Pseudomonas pictorum* on immobilized with chitin. Afr. J. Biotechnol. 6, 296-303.
- [36] Kim J.W., Armstrong M.E. (1981) A comprehensive study on the biological treatabilities of phenol and methanol II, The effects of temperature, pH salinity and nutrients. Water Res. 15:1233-1247.
- [37] Robertson B.K., Alexander M. (1992) Influence of calcium, iron and pH on phosphate availability for microbial mineralization of organic chemicals. Appl Environ Microbiol. 58:38-41.
- [38] Karigar C. A., Mahesh M., Nagenahalli and D.J. Yun. (2006) Phenol degradation by immobilized cells of *Arthrobacter citreus*. Biodegradation, 17, 47-55.
- [39] Kar S. T., Swaminathan and A. Baradarajan. (1996) Studies on biodegradation of a mixture of toxic and non toxic pollutant using *Arthrobacter* species, Bioproc. Biosys Engg. 15, 195-199.
- [40] Santos, V.L., N.M. Heilbuth., D.T. Braga., A.S. Monteiro., and V.R.J. Linard. (2003) Phenol degradation by a Graphium sp. FIB4 isolated from industrial effluent. Basic Microbiol., 43, 238-248.
- [41] Khaled M. Khleifat. (2006) Biodegradation of phenol by Ewingella Americana: Effect of carbon starvation and some growth conditions. Process Biochemistry, 41, 2010-2016.